










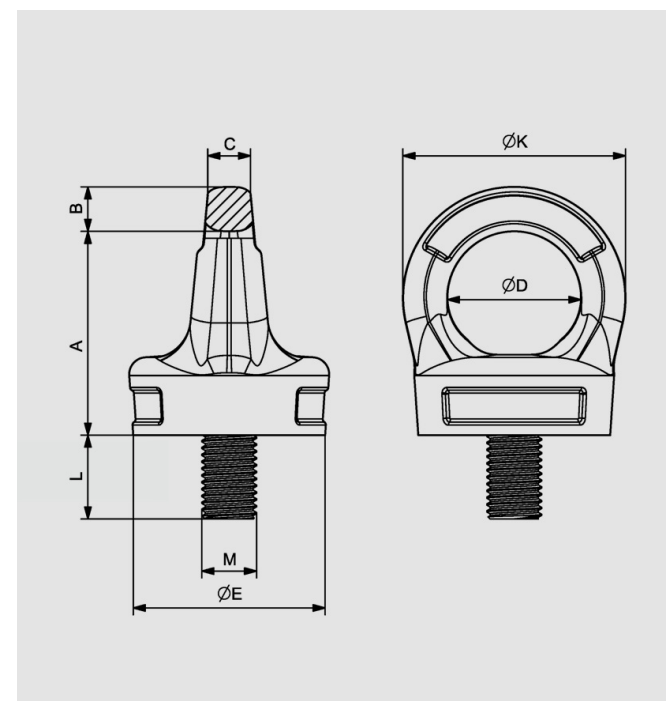

GOLFARE GIREVOLE H.Q. / ROTATING EYEBOLT H.Q.

GOLFARE GIREVOLE H.Q. (con o senza chiave) ROTATING EYEBOLT H.Q.									
Misura Size	WLL	A	B	C	D	E	K	L	Peso Weight
mm	t	mm	mm	mm	Ø mm	Ø mm	Ø mm	mm	kg
M8	0,3	44,5	8	10	29	32	45	12	0,3
M10	0,4	44,5	8	10	29	32	45	16	0,3
M12	0,75	53,5	11	11	34	44	56	18	0,46
M16	1,5	56,5	13	14,5	39	56	65	24	0,9
M20	2,3	67	14	17	42	58	70	30	1,15
M24	3,2	80	18	19	52	73	88	36	2,05
M30	4,5	101	22	27	62	80	106	43	3,12
M36	7	125	37	38	80	95	154	54	6,7
M42	9	148	40	41	90	105	170	64	9,5
M48	12	165	45	47	95	120	185	72	13,55
Disponibile anche con filettatura UNC Also available with UNC thread									



GOLFARE GIREVOLE H.Q. / ROTATING EYEBOLT H.Q.

CABLES_012021

LIMITI CARICO DI LAVORO WORKING LOAD LIMIT W.L.L (T)											
											
Misura Size	0°	0°	90°	90°	0°-45°	45°-60°	Asimm	0°-45°	45°-60°	Asimm	Coppia max di serraggio Max tightening couple
	1 braccio Single leg	2 bracci 2 legs	1 braccio Single leg	2 bracci 2 legs	2 bracci 2 legs			3/4 bracci 3/4 legs			(Nm)
M8	1	2	0,3	0,6	0,42	0,3	0,3	0,63	0,45	0,3	8
M10	1	2	0,4	0,8	0,56	0,4	0,4	0,84	0,6	0,4	16
M12	2	4	0,75	1,5	1	0,75	0,75	1,6	1,12	0,75	28
M16	4	8	1,5	3	2	1,5	1,5	3,15	2,25	1,5	70
M20	6	12	2,3	4,6	3,22	2,3	2,3	4,83	3,45	2,3	135
M24	8	16	3,2	6,4	4,48	3,2	3,2	6,7	4,8	3,2	230
M30	12	24	4,5	9	6,3	4,5	4,5	9,4	6,7	4,5	465
M36	16	32	7	14	9,8	7	7	14,7	10,5	7	814
M42	24	45	9	18	12,6	9	9	18,9	13,5	9	1304
M48	32	64	12	24	16,8	12	12	25,2	18	12	1981