


GOLFARE GIREVOLE H.T. / ROTATING EYEBOLT H.T.

GOLFARE GIREVOLE H.T. con o senza chiave ROTATING EYEBOLT H.T.											
Misura Size	W.L.L.	A	B	C	D	E	F	K	L	CH	Peso Weight
mm	t	mm	mm	mm	Ø mm	Ø mm	mm	Ø mm	mm	mm	kg
M08	0,3	33,7	10	9,8	25	25,5	30	46	12	6	0,12
M10	0,4	33,7	10	9,8	25	25,5	30	46	15	6	0,12
M12	0,75	41,5	12,5	11,5	30	30,6	36,5	55,5	18	8	0,2
M14	0,75	41,5	12,5	11,5	30	30,6	36,5	55,5	18	8	0,2
M16	1,5	49,5	14,5	15,7	35	36,5	42	64,5	24	10	0,35
M18	1,5	49,5	14,5	15,7	35	36,5	42	64,5	24	10	0,35
M20	2,3	58	16	18	40	42	52,5	74,5	30	12	0,6
M22	2,3	58	16	18	40	42	52,5	74,5	30	12	0,6
M24	3,2	69	20,5	22	49	50	61	90	36	12	1
M27	3,2	69	20,5	22	49	50	61	90	36	12	1
M30	4,5	86	25,5	28	60	66	75	111	45	17	2
M33	4,5	86	25,5	28	60	66	75	111	45	17	2
M36	7	105	32	30	74	77	96,5	135	55	22	3,4
M42	9	118	38	37	82	87	110	158	65	24	5,7
M48	12	137	43	38	95	102	124,5	180	72	27	8,5
Disponibile anche con filettatura UNC Also available with UNC thread											

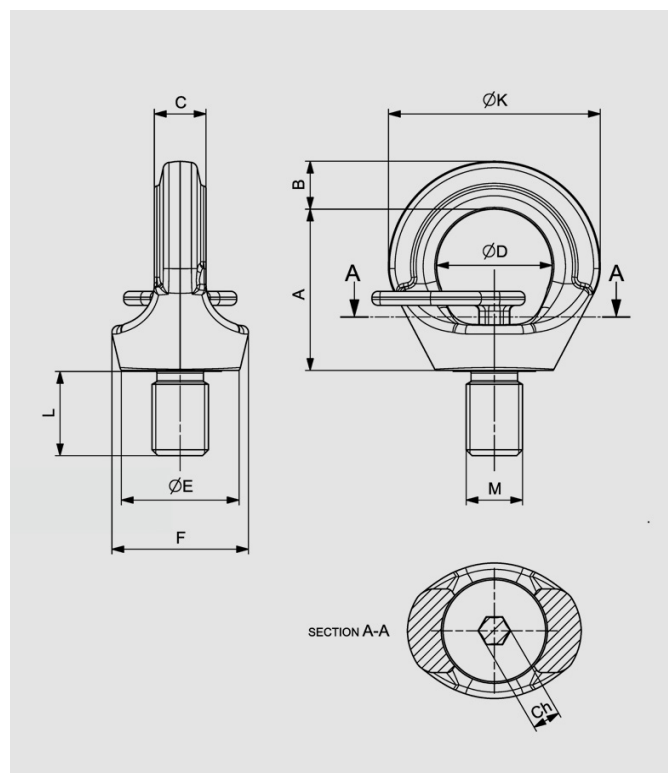

GOLFARE GIREVOLE H.T. / ROTATING EYEBOLT H.T.

CABLES_012021

LIMITI CARICO DI LAVORO WORKING LOAD LIMIT W.L.L (T)											
											
Misura Size	0°	0°	90°	90°	0°-45°	45°-60°	Asimm	0°-45°	45°-60°	Asimm	Coppia max di serraggio Max tightening couple
(mm)	1 braccio Single leg	2 bracci 2 legs	1 braccio Single leg	2 bracci 2 legs	2 bracci 2 legs			3/4 bracci 3/4 legs			(Nm)
M8	1	2	0,3	0,6	0,42	0,3	0,3	0,63	0,45	0,3	8
M10	1	2	0,4	0,8	0,56	0,4	0,4	0,84	0,6	0,4	16
M12	2	4	0,75	1,5	1	0,75	0,75	1,6	1,12	0,75	25
M14	2	4	0,75	1,5	1	0,75	0,75	1,6	1,12	0,75	30
M16	4	8	1,5	3	2	1,5	1,5	3,15	2,25	1,5	60
M18	4	8	1,5	3	2	1,5	1,5	3,15	2,25	1,5	70
M20	6	12	2,3	4,6	3,22	2,3	2,3	4,83	3,45	2,3	110
M22	6	12	2,3	4,6	3,22	2,3	2,3	4,83	3,45	2,3	120
M24	8	16	3,2	6,4	4,48	3,2	3,2	6,7	4,8	3,2	195
M27	8	16	3,2	6,4	4,48	3,2	3,2	6,7	4,8	3,2	240
M30	12	24	4,5	9	6,3	4,5	4,5	9,4	6,7	4,5	320
M33	12	24	4,5	9	6,3	4,5	4,5	9,4	6,7	4,5	350
M36	16	32	7	14	9,8	7	7	14,7	10,5	7	585
M42	24	45	9	18	12,6	9	9	18,9	13,5	9	920
M48	32	64	12	24	46,8	12	12	25,2	18	12	1590