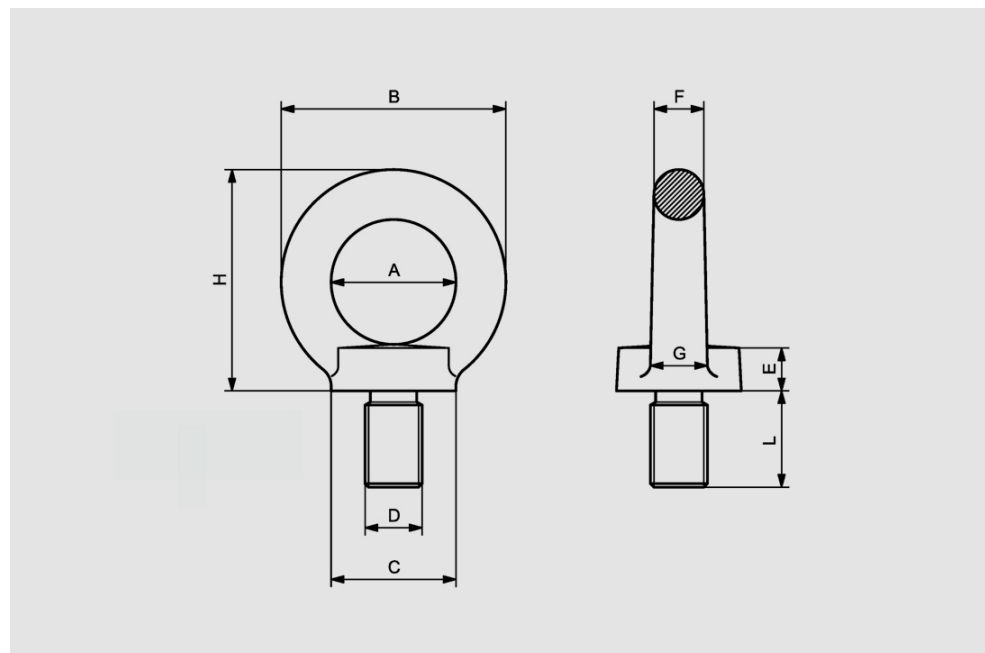




GOLFARE MASCHIO 8.8 / LIFTING EYE BOLTS 8.8

GOLFARE MASCHIO 8.8 LIFTING EYE BOLTS 8.8							
Misura Size	A	B	C	E	F	H	Peso Weight
D x L (mm)	mm	mm	mm	mm	mm	mm	kg
M6x13	25	45	25	10	10	45	0,09
M8x13	25	45	25	10	10	45	0,09
M10x17	25	45	25	10	10	45	0,11
M12x21	35	63	35	14	14	62	0,27
M14x21	35	63	35	14	14	62	0,29
M16x27	35	63	35	14	14	62	0,31
M18x27	50	90	50	20	20	90	0,84
M20x30	50	90	50	20	20	90	0,86
M22x36	50	90	50	20	20	90	0,9
M24x36	50	90	50	20	20	90	0,9
M27x45	60	108	65	24	24	109	1,66
M30x45	60	108	65	24	24	109	1,7
M33x54	70	126	75	26	28	128	2
M36x54	70	126	75	26	28	128	2,15
M42x63	80	144	85	30	32	147	4,15
M48x68	90	166	100	35	38	168	6,2
M56x78	100	184	110	38	42	187	8,8
M64x90	110	206	120	42	48	208	12,4



GOLFARE ORIENTABILE CON VITE 8.8 / EYEBOLT WITH SCREW 8.8

CABLES_012021

LIMITI CARICO DI LAVORO WORKING LOAD LIMIT W.L.L (T)							
							
Misura Size	0°	0°	0°-45°	45°-60°	0°-45°	45°-60°	Coppia max di serraggio Max tightening couple
	1 braccio Single leg	2 bracci 2 legs	2 bracci 2 legs		3/4 bracci 3/4 legs		(Nm)
M6x13	0,4	0,8	0,14	0,1	0,2	0,14	3,5
M8x13	0,8	1,6	0,28	0,2	0,4	0,28	8
M10x17	1	2	0,35	0,25	0,5	0,35	16
M12x21	1,6	3,2	0,56	0,4	0,8	0,56	28
M14x21	3	6	1	0,75	1,5	1	45
M16x27	4	8	1,4	1	2	1,4	70
M18x27	5	10	1,8	1,25	2,5	1,8	95
M20x30	6	12	2,1	1,5	3	2,1	135
M22x36	7	14	2,4	1,75	3,5	2,4	182
M24x36	8	16	2,8	2	4	2,8	230
M27x45	10	20	3,5	2,5	5	3,5	343
M30x45	12	24	4,2	3	6	4,2	465
M33x54	14	28	4,8	3,4	6,8	4,8	632
M36x54	16	32	5,6	3,9	7,8	5,4	814
M42x63	24	48	8,4	5,9	11,8	8,2	1304
M48x68	32	64	11,2	7,8	15,6	10,9	1981
M56x78	36	72	12,6	8,8	17,6	12,3	3000
M64x90	45	90	15,7	11	22	15,4	4736