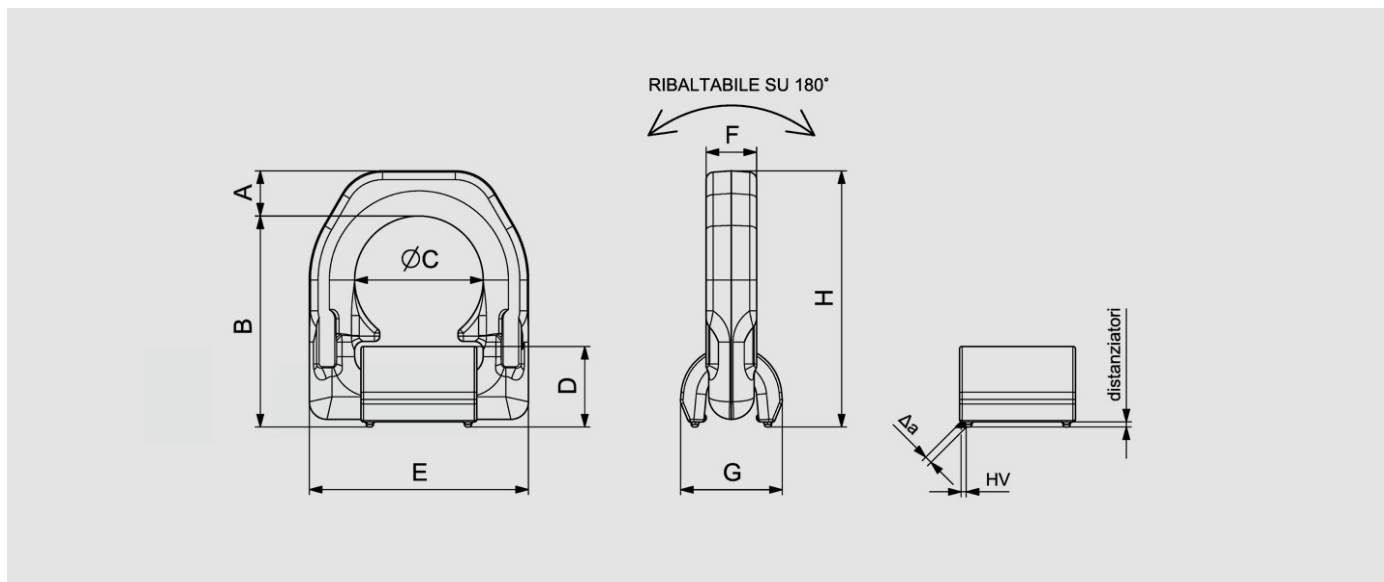












STAFFA A SALDARE A BASE SINGOLA PER SOLLEVAMENTO / *LIFTING RING WELD-ON TYPE SINGLE BASE*

STAFFA A SALDARE A BASE SINGOLA PER SOLLEVAMENTO con o senza molla <i>LIFTING RING WELD-ON TYPE SINGLE BASE</i>										
W.L.L.	A	B	C	D	E	F	G	H	Spessore saldatura <i>Welding thickness</i>	Peso <i>Weight</i>
t	mm	mm	mm	mm	mm	mm	mm	mm	HV + $\Delta a$	kg
1,5	14	65	38	25	66	16	31	79	HV 5+3	0,39
2,5	16	75	45	27	77	18	34,5	91	HV 7+3	0,59
4	18	84	51	32	87	20	40	102	HV 8+3	0,87
6,7	24	117	67,3	44	115	26	58,5	141	HV 12+4	2,23
10	31	126	67	55	129	28,5	70,5	157	HV 16+4	3,33
16	45	174	100	69	190	42	87	219	HV 25+6	9,28



STAFFA A SALDARE A BASE SINGOLA PER SOLLEVAMENTO / LIFTING RING WELD-ON TYPE SINGLE BASE

CABLES\_012021

LIMITI CARICO DI LAVORO WORKING LOAD LIMIT W.L.L (T)									
									
0°	0°	90°	90°	0°-45°	45°-60°	Asimm	0°-45°	45°-60°	Asimm
1 braccio Single leg	2 braccia 2 legs	1 braccio Single leg	2 braccia 2 legs	2 braccia 2 legs			3/4 braccia 3/4 legs		
1,5	3	1,5	3	2,1	1,5	1,5	3,15	2,25	1,5
2,5	5	2,5	5	3,5	2,5	2,5	5,25	3,75	2,5
4	8	4	8	5,6	4	4	8,4	6	4
6,7	13,4	6,7	13,4	9,38	6,7	6,7	14,1	10,1	6,7
10	20	10	20	14	10	10	21	15	10
16	32	16	32	22,4	16	16	33,6	24	16