


GOLFARE GIREVOLE CON SNODO / HEAVY LIST SWIVEL HOIST RING

GOLFARE GIREVOLE CON SNODO HEAVY LIST SWIVEL HOIST RING														
Misura Size	W.L.L.	A	B	C	E	F	G	H	J	K	L	CH	ch	Peso Weight
mm	t	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kg
M8	0,3	56	28	14	30	55	11	99	40	33,5	12	13	5	0,375
M10	0,6	56	28	14	30	55	11	99	40	34,5	15	17	6	0,375
M12	1	56	28	14	30	55	11	99	40	35,5	18	19	7	0,375
M14	1,3	74,5	38	18	47	78	17	135,5	55	46	21	22	7	1,3
M16	1,6	74,5	38	18	47	78	17	135,5	55	46,5	25	24	10	1,3
M18	2	74,5	38	18	47	78	17	135,5	55	47	27	27	10	1,3
M20	2,5	74,5	38	18	47	78	17	135,5	55	48	30	30	12	1,3
M22	3	106	56	25	62	114,5	22	198,5	84	63,5	33	32	12	4
M24	4	106	56	25	62	114,5	22	198,5	84	64,5	36	36	14	4
M27	5	106	56	25	62	114,5	22	198,5	84	66,5	40	41	14	4
M30	6,3	106	56	25	62	114,5	22	198,5	84	68	45	46	17	4

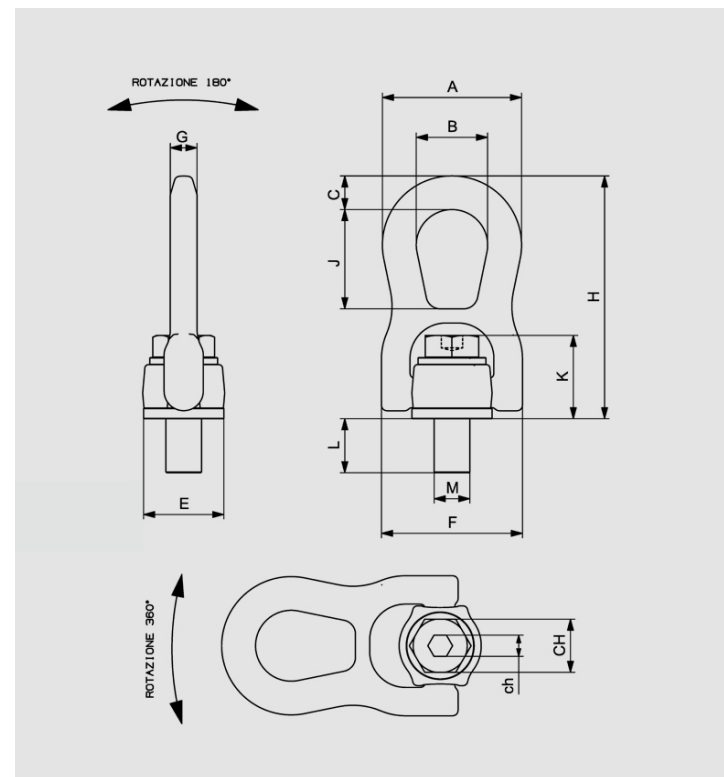

GOLFARE GIREVOLE CON SNODO / HEAVY LIST SWIVEL HOIST RING

CABLES_012021

LIMITI CARICO DI LAVORO WORKING LOAD LIMIT W.L.L (T)											
											
Misura Size	0°	0°	90°	90°	0°-45°	45°-60°	Asimm	0°-45°	45°-60°	Asimm	Coppia max di serraggio Max tightening couple
(mm)	1 braccio Single leg	2 bracci 2 legs	1 braccio Single leg	2 bracci 2 legs	2 bracci 2 legs			3/4 bracci 3/4 legs			(Nm)
M8	0,5	1	0,3	0,6	0,4	0,3	0,3	0,6	0,45	0,3	10
M10	1	2	0,6	1,2	0,8	0,6	0,6	1,3	0,9	0,6	15
M12	1,3	2,6	1	2	1,4	1	1	2,1	1,5	1	25
M14	2	4	1,3	2,6	1,8	1,3	1,3	2,7	1,9	1,3	30
M16	2,5	5	1,6	3,2	2,2	1,6	1,6	3,4	2,4	1,6	60
M18	3	6	2	4	2,8	2	2	4,2	3	2	100
M20	3,5	7	2,5	5	3,5	2,5	2,5	5,3	3,7	2,5	120
M22	4,5	9	3	6	4,2	3	3	6,3	4,5	3	130
M24	5,5	11	4	8	5,6	4	4	8,4	6	4	200
M27	6,5	13	5	10	7	5	5	10,5	7,5	5	250
M30	7	14	6,3	12,6	8,8	6,3	6,3	13,2	9,4	6,3	350