


GOLFARE GIREVOLE CON SNODO / *HEAVY LIFT SWIVEL HOIST RING*

GOLFARE GIREVOLE CON SNODO HEAVY LIFT SWIVEL HOIST RING													
Misura Size	W.L.L.	A	B	C	E	F	G	H	J	K	L	ch	Peso Weight
mm	t	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kg
M33	8	150	85	32	76,5	150	32	220	108	80	50	17	6
M36	10	150	85	32	76,5	150	32	220	108	80	54	17	6
M39	10	150	85	32	76,5	150	32	220	108	80	58	17	6
M42	12,5	150	85	32	76,5	150	32	220	108	80	63	17	6
M45	15	176	100	39	95	176	39	257	128	90	63	17	10,5
M48	20	176	100	39	95	176	39	257	128	90	68	17	10,5
M52	20	176	100	39	95	176	39	257	128	90	68	17	10,5
M56	25	200	113	46	110	200	46	277	126	105	78	19	16,3
M64	35	200	113	46	110	200	46	277	126	105	90	19	16,3
M72	25	200	113	46	110	200	46	277	126	105	90	19	16,3
M80	35	200	113	46	110	200	46	277	126	105	90	19	16,3
M90	35	200	113	46	110	200	46	277	126	105	90	19	16,3
M100	35	200	113	46	110	200	46	277	126	105	90	19	16,3

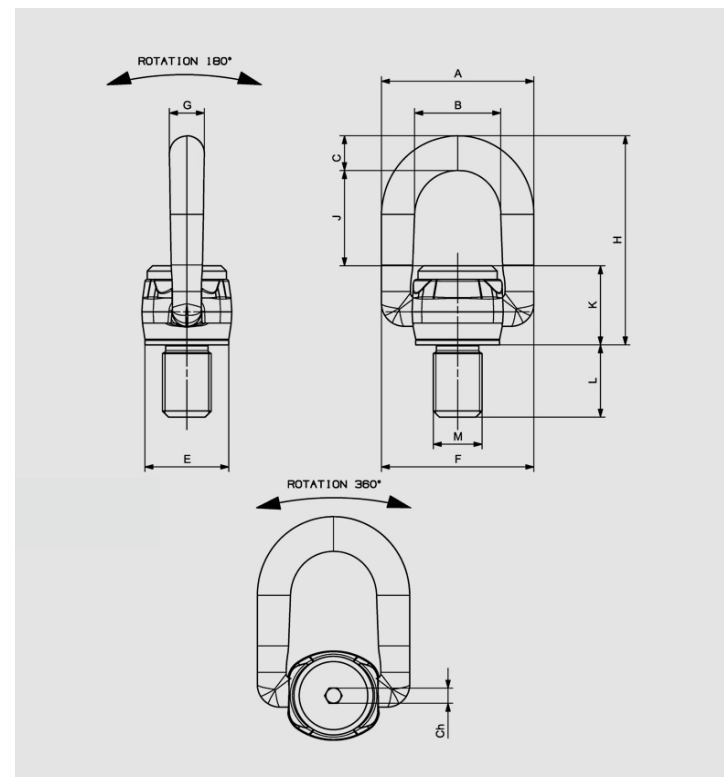

GOLFARE GIREVOLE CON SNODO / HEAVY LIST SWIVEL HOIST RING

CABLES_012021

LIMITI CARICO DI LAVORO WORKING LOAD LIMIT W.L.L (T)											
											
Misura Size	0°	0°	90°	90°	0°-45°	45°-60°	Asimm	0°-45°	45°-60°	Asimm	Coppia max di serraggio Max tightening couple
(mm)	1 braccio Single leg	2 braccia 2 legs	1 braccio Single leg	2 braccia 2 legs	2 braccia 2 legs			3/4 braccia 3/4 legs			(Nm)
M33	8	16	8	16	11,2	8	8	16,8	12	8	600
M36	10	20	10	20	14	10	10	21	15	10	814
M39	10	20	10	20	14	10	10	21	15	10	814
M42	12,5	25	12,5	25	17,5	12,5	12,5	26,3	18,8	12,5	1304
M45	15	30	15	30	21	15	15	32	22,5	15	1670
M48	20	40	20	40	28	20	20	42	30	20	1981
M52	20	40	20	40	28	20	20	42	30	20	1981
M56	25	50	25	50	35	25	25	52,5	37,5	25	3000
M64	35	70	35	70	49	35	35	73,5	52,5	35	4738
M72	25	50	25	50	35	25	25	52,5	25	25	6913
M80	35	70	35	70	49	35	35	73,5	52,5	35	9625
M90	35	70	35	70	49	35	35	73,5	52,5	35	14000
M100	35	70	35	70	49	35	35	73,5	52,5	35	14000